



origin
DOORS AND WINDOWS


Multipoint Lock

Operating Instructions

All ILH Locks come with a latch hold back feature. This is to avoid accidental lock out when used for Lever/Pad option. Simply depress the latch & slide the Black component upwards.

The Lock Latch can be easily reversed by removing Csk Screw with a standard Cross Head Screwdriver, spinning the latch through 180 degrees & re-tightening screw.

This procedure should be carried out using hand tools.

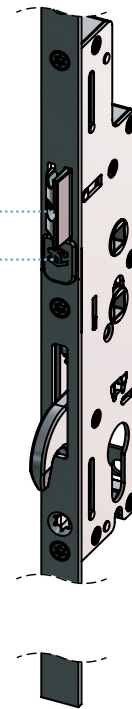

Keep Latch is adjustable by $\pm 2.5\text{mm}$. This can be achieved by slackening off the two latch screws using a standard Cross head screwdriver, moving the latch to the desired position, & then re-tighten the two screws.

Various ILH 1 Piece Keeps are fitted with fixing hole cover caps if concealed frame fixing is required.

